

## MAINTENANCE INSTRUCTION

The fan requires little maintenance. Do not try to fix it by yourself. Refer it to qualified service personnel if service is needed.

1. Before cleaning and assembling, do not plug the pins into the socket.
2. To ensure adequate air circulation to the motor. Keep vents at the rear of the motor housing from dust, fluff and etc. A vacuum cleaner can not be used to clean these vents before unplug. Do not disassemble the fan remove fluff.
3. Please wipe the exterior parts with a soft cloth soaking a mild detergent.
4. Do not use any abrasive detergent or solvents to avoid scratching the surface. Do not use of the following as a cleaner: gasoline, thinner, bending.
5. Do not allow water or any other liquid into the motor housing or interior parts.

## CLEANING

1. Be sure to unplug from the electrical supply source before cleaning.
2. Plastic parts should be cleaned with a soft cloth moisten with mild soap. Thoroughly remove soap film with dry cloth.


**DISPOSAL:** Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.



# Q-CONNECT<sup>®</sup>

## OPERATING INSTRUCTIONS

Model: KF00401

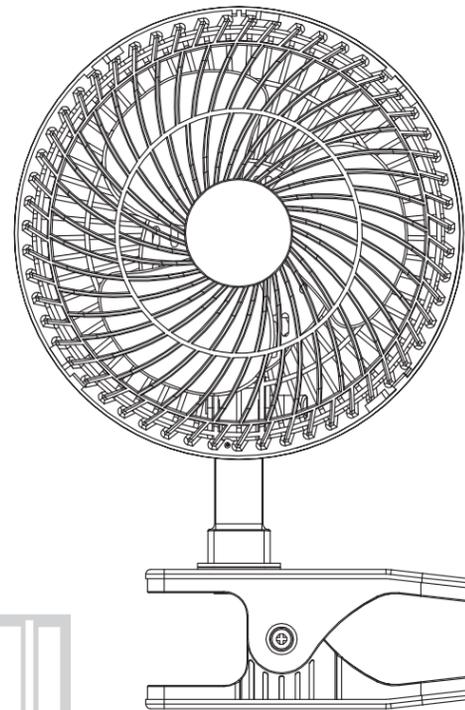

2 Speed  
Desk Fan

FITTED WITH  
BS1363  
BSI APPROVED PLUG

Read these instructions and keep for future reference

## CAUTION

Read Rules for Safe Operation and Instructions Carefully.

## WARNING

1. Do not leave the fan running unattended.
2. Keep electrical appliances out of reach from Children or infirm persons. Do not let them use the appliances without supervision.
3. Ensure that the fan is switched off from the supply mains before removing the guard.
4. If the supply cord is damaged, it must be replaced by manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.
5. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
6. Children should be supervised to ensure that they do not play with the appliance.

## WARNING INSTRUCTIONS


### PLUG REPLACEMENT

This appliance is supplied with a BS1363 3 pin plug fitted with a 3 Amp fuse. Should the fuse require replacement, it must be replaced with a fuse rated at 3 Amp and approved to BS1362.

In the event the mains plug has to be removed/replaced for any reason, please note:

**IMPORTANT:** The wires in the mains lead are coloured in accordance with the following code:

Blue – Neutral  
Brown – Live

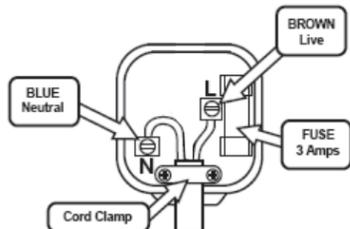


As the colours of the wires in the mains lead of this appliance may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows. The blue wire must be connected to the terminal marked with an N or coloured black. The brown wire must be connected to the terminal marked with an L or coloured red.

**WARNING:** Never connect live or neutral wires to the earth terminal of the plug.

**NOTE:** If a moulded plug is fitted and has to be removed take great care in disposing of the plug and severed cable, it must be destroyed to prevent engaging into a socket.

## CLIP FAN AT A GLANCE

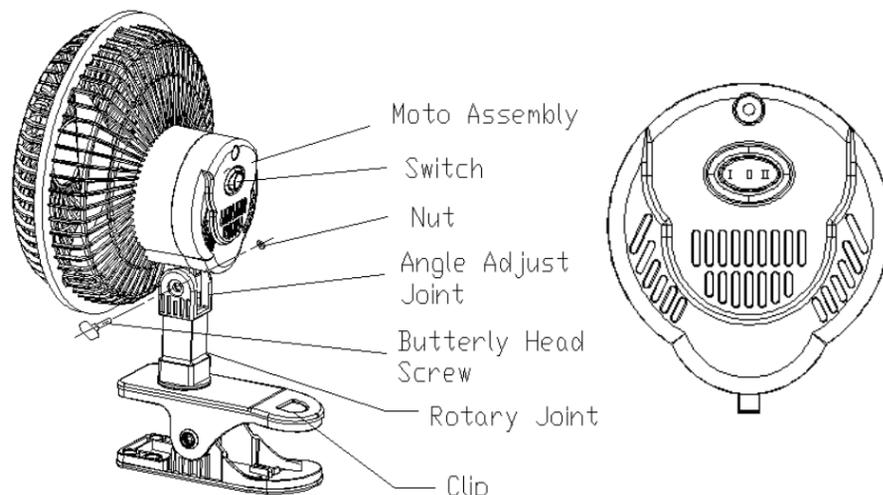


## ASSEMBLY INSTRUCTIONS

To assemble this fan, attach the motor assembly to the angle adjusting joint of the clip by the butterfly head screw and nut.

## OPERATING INSTRUCTIONS

1. Place the clip onto a secure structure. The clip can accommodate a 1.00-1.65" thick structure.
2. Figures 1 – 3 illustrate the incorrect way to clip the fan to a structure and the incorrect structures to clip.
3. Fan speed is controlled by the rotary switch (LOW – OFF – HI) | – 0 – II.
4. The air flow can be adjusted upward or downward by loosening the angle adjusting joint. Retighten knob securely.
5. The direction of air flow can be adjusted by turning the rotary joint.

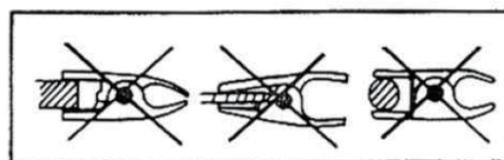

(Fig. 1)

(Fig. 2)

(Fig. 3)

